
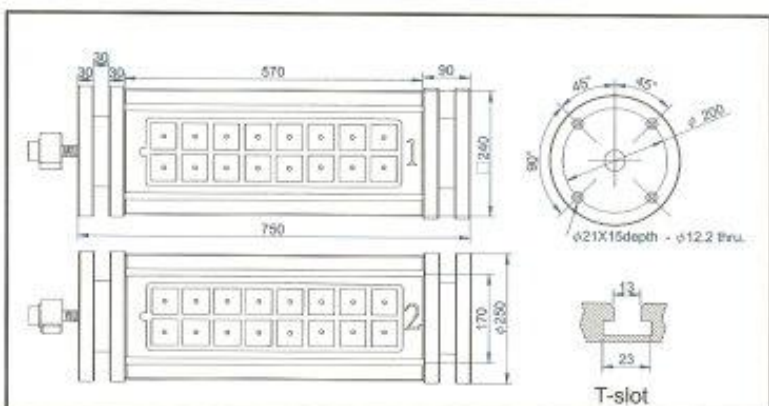
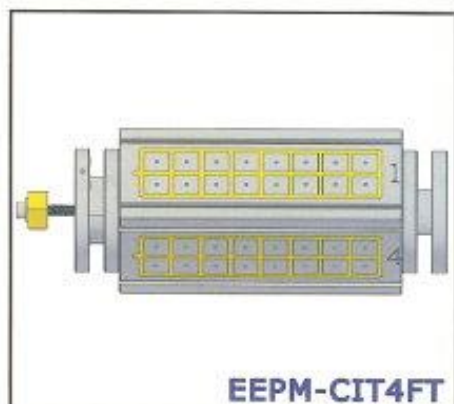
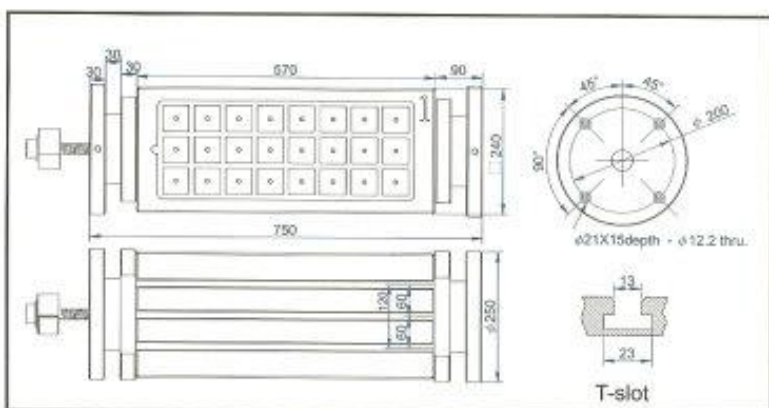
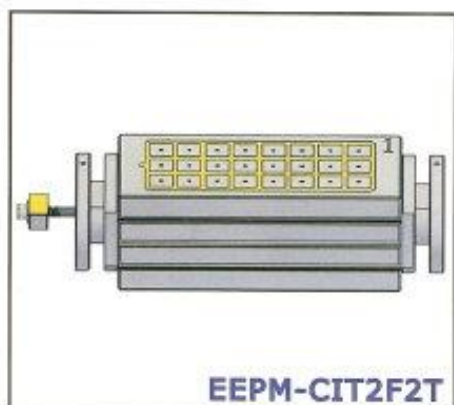


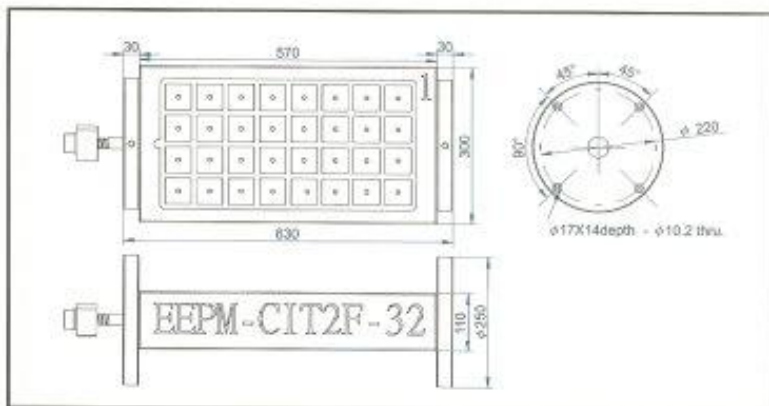

Unit:mm

MODEL NO.	WORKING FACE	PITCH	POLE	NO.OF POLE	CHUCK N.W.	VOLTAGE	CURRENT AMP	CONTROLLER (included)	VOLTAGE	CURRENT AMP	CONTROLLER (included)
EEPM-CIT2F	300X570	10	50X50	32X2	141kg	AC 220V	31A	C1	AC 380V 440V	34A	C1
EEPM-CIT2F2T	240X570			24X2	228kg		22A	C1		10A	C1
EEPM-CIT4FT	240X570			16X4	219kg		14A	C1		7A	C1


Custom-made is available.

Features:

1. Super power magnetic force 1000kgf/100cm². (4 Poles)
2. Control each working face for ON and OFF, so it can be load and unload the workpiece on each working face. 3 seconds control for power ON and OFF.
3. EEPM-CIT2F with 2 magnetic working face, can be clamp 2 workpiece for machining.
Suitable for bigger workpiece machining.
4. EEPM-CIT2F2T with 2 magnetic working face and 2 T-slot working face, can be clamp both of magnetic and non-magnetic material of workpiece machining. Suitable for smaller workpiece machining.
5. EEPM-CIT4FT with 2 magnetic working face and T-slots available. Suitable for smaller workpiece machining.
6. Without any obstructed movement of cutters during machining. Can be use all the functions of CNC 4 Axis Index Device completely.

Applications:

1. Suitable in use for combine with CNC 4 Axis Index Device.
2. Minimum thickness of workpiece required : 10mm.
3. Minimum size of workpiece required as 4 alternate magnetic square poles and above is necessary for optimum clamping.

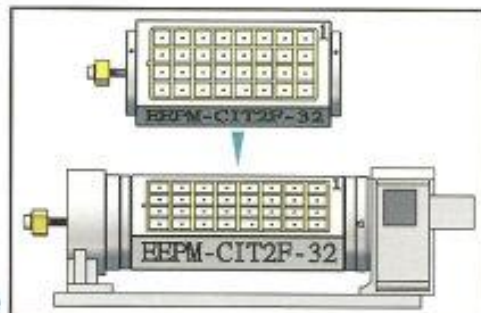

Working Example

