


Angle Head

AHA Type

- The body is made of Ductile Cast Iron. High strength steel; stable machining.
- Wide selections of tool shanks. The design of ER32, ER40, and FA25.4 heads ensures various applications.
- Can be automatic tool changed. Increases productivity.
- Suitable for light and middle cutting.

Run-out	: 0.002 mm
Material	: Ductile Cast Iron
R.P.M.	: Max. 4000 RPM
Torque	: Max. 27 Nm
Gear Ratio	: 1 : 0.81
Spindle Type	: BT, NT(ISO), SK, CAT, HSK
Standard Accessory	: Hook Spanner ER Wrench, ER Nut
Output Rotation	: Reverse to Input Rotation

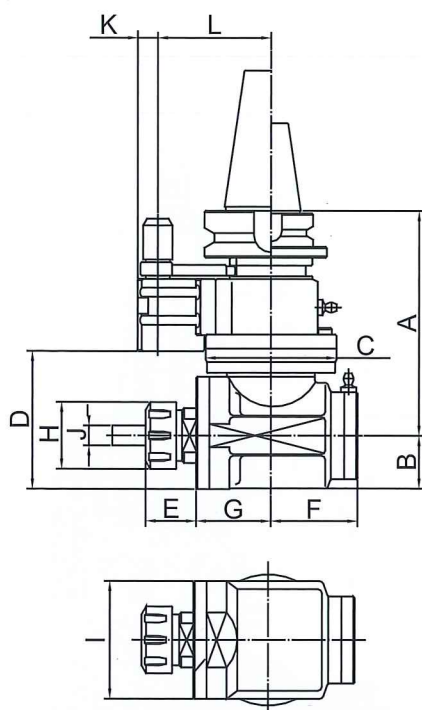

Model No.	A	B	C	D	E max	F	G	H	I	J	K	L	N.W. (KG)
AHA-BT40-ER32	168	39.5	98	103	39	65	56	50	88	3~20	15	65/80/85	7.8
AHA-BT50-ER32	171	39.5	98	103	39	65	56	50	88	3~20	15	80/85/110	9.5
AHA-BT40-ER40	168	39.5	98	103	44	65	56	63	88	4~26	15	65/80/85	7.8
AHA-BT50-ER40	171	39.5	98	103	44	65	56	63	88	4~26	15	80/85/110	9.5
AHA-NT50-ER32	171	39.5	98	103	39	65	56	50	88	3~20	15	80/85/110	7.8
AHA-NT50-ER40	171	39.5	98	103	44	65	56	63	88	4~26	15	80/85/110	9.5
AHA-SK40-ER32	168	39.5	98	103	39	65	56	50	88	3~20	15	65/80/85	7.8
AHA-SK50-ER32	171	39.5	98	103	39	65	56	50	88	3~20	15	80/85/110	9.5
AHA-SK40-ER40	168	39.5	98	103	44	65	56	63	88	4~26	15	65/80/85	7.8
AHA-SK50-ER40	171	39.5	98	103	44	65	56	63	88	4~26	15	80/85/110	9.5
AHA-CAT40-ER32	168	39.5	98	103	39	65	56	50	88	3~20	15	65/80/85	7.8
AHA-CAT50-ER32	171	39.5	98	103	39	65	56	50	88	3~20	15	80/85/110	9.5
AHA-CAT40-ER40	168	39.5	98	103	44	65	56	63	88	4~26	15	65/80/85	7.8
AHA-CAT50-ER40	171	39.5	98	103	44	65	56	63	88	4~26	15	80/85/110	9.5
AHA-HSK63-ER32	175	39.5	98	103	39	65	56	50	88	3~20	15	65/80/85	7.8
AHA-HSK100-ER32	178	39.5	98	103	39	65	56	50	88	3~20	15	80/85/110	7.8
AHA-HSK63-ER40	175	39.5	98	103	44	65	56	63	88	4~26	15	65/80/85	9.5
AHA-HSK100-ER40	178	39.5	98	103	44	65	56	63	88	4~26	15	80/85/110	9.5


Unit : mm

Angle Head

AHB Type

- The body is made of Ductile Cast Iron. High strength steel; stable machining.
- Can be automatic tool changed. Increases productivity.

Run-out	: 0.002 mm
Material	: Ductile Cast Iron
R.P.M.	: Max. 4000 RPM
Torque	: Max. 47 Nm
Gear Ratio	: 1 : 1
Spindle Type	: BT, SK, CAT, HSK
Standard Accessory	: Hook Spanner ER Wrench, ER Nut
Output Rotation	: Reverse to Input Rotation

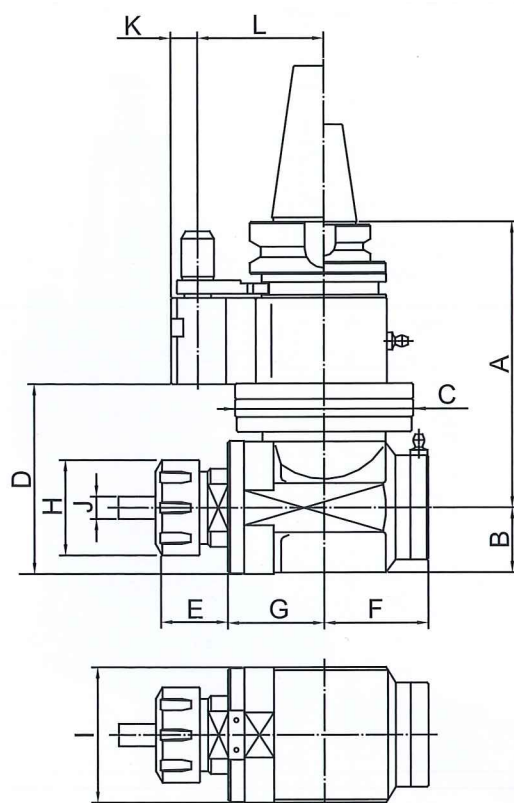

Model No.	A	B	C	D	E max	F	G	H	I	J	K	L	N.W. (KG)
AHB-BT40-ER40	192	43.5	120	127.5	44	70	65	63	91	4~26	18	70/80/85	12.1
AHB-BT50-ER40	195	43.5	120	127.5	44	70	65	63	91	4~26	18	80/85/110	14.7
AHB-SK40-ER40	192	43.5	120	127.5	44	70	65	63	91	4~26	18	70/80/85	12.1
AHB-SK50-ER40	195	43.5	120	127.5	44	70	65	63	91	4~26	18	80/85/110	14.7
AHB-CAT40-ER40	192	43.5	120	127.5	44	70	65	63	91	4~26	18	70/80/85	12.1
AHB-CAT50-ER40	195	43.5	120	127.5	44	70	65	63	91	4~26	18	80/85/110	14.7
AHB-HSK63-ER40	206	43.5	120	127.5	44	70	65	63	91	4~26	18	70/80/85	12.1
AHB-HSK100-ER40	202	43.5	120	127.5	44	70	65	63	91	4~26	18	80/85/110	14.7

Unit : mm