
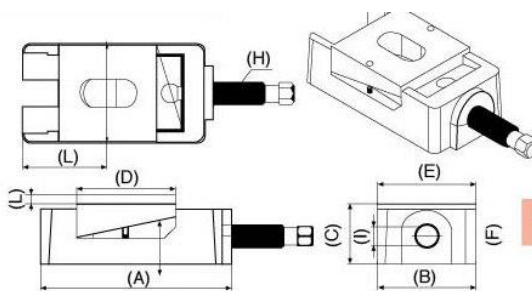


Machine Tool Level Regulators

FEATURES:

- Suitable for General Machine (three unit assemble)

Type A





Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	L	J
A-3	3T	160	80	55	80	85	28	25	M20 x P2	19	60	8
A-5	5T	205	105	60	100	105	30	30	M24 x P2	23	80	10
A-10	10T	205	110	70	100	105	40	30	M24 x P2	23	80	10
A-15	15T	230	150	80	140	140	44	45	M30 x P1.5	30	90	10
A-20	20T	320	200	105	150	200	44	50	M30 x P1.5	30	130	10

Type SA

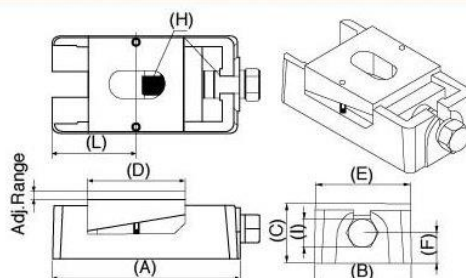

Development elevation



UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj. Range	L
SA-3	3T	160	80	60	80	85	28	25	M16 x P2	23	8	60
SA-5	5T	205	105	65	100	105	30	30	M18 x P2	30	10	80
SA-10	10T	205	110	70	100	105	40	30	M18 x P2	30	10	80
SA-15	15T	230	150	80	120	140	44	45	M20 x P1.5	38	10	90
SA-20	20T	320	200	105	150	200	48	50	M24 x P1.5	38	10	130

FEATURES:

- Coordinate with anchor, Easy to assemble (three unit assemble)

Type B


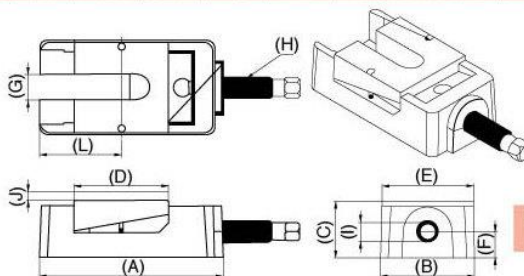



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	L	J
B-3	3T	160	80	55	80	85	28	25	M20 x P2	19	6	60
B-5	5T	205	105	60	100	105	30	30	M24 x P2	23	8	80
B-10	10T	205	110	70	100	105	40	30	M24 x P2	23	8	80
B-15	15T	230	150	80	140	140	44	45	M30 x P1.5	30	8	90
B-20	20T	320	200	105	150	200	44	50	M30 x P1.5	30	8	130

Type SB

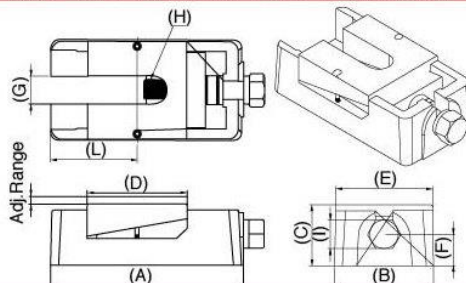

Development elevation



UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	L	J
B-3	3T	160	80	55	80	85	28	25	M20 x P2	19	6	60
B-5	5T	205	105	60	100	105	30	30	M24 x P2	23	8	80
B-10	10T	205	110	70	100	105	40	30	M24 x P2	23	8	80
B-15	15T	230	150	80	140	140	44	45	M30 x P1.5	30	8	90
B-20	20T	320	200	105	150	200	44	50	M30 x P1.5	30	8	130

FEATURES:

- When the ground is not flat, may remain fully engaged (four units assemble)
- Suitable for high precision machine

Type AU

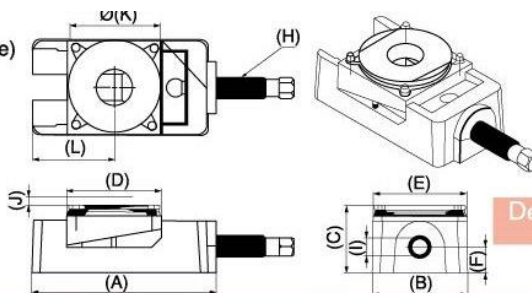



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	J	K	L
AU-3	3T	160	80	65	80	85	28	25	M20 x P2	19	8	80	60
AU-5	5T	205	105	70	100	105	30	30	M24 x P2	23	10	100	80
AU-10	10T	205	110	80	100	105	40	30	M24 x P2	23	10	100	80
AU-15	15T	230	150	90	140	140	44	45	M30 x P1.5	30	10	140	90
AU-20	20T	320	200	115	150	200	44	50	M30 x P1.5	30	10	150	130

Type SAU

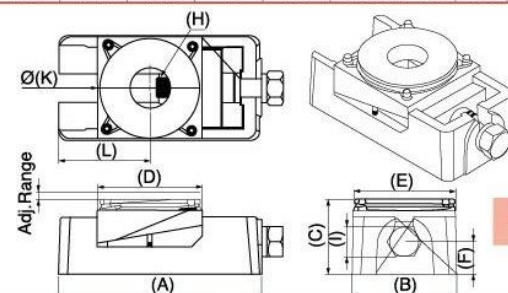

Development elevation



UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj.Range	K	L
SAU-3	3T	160	80	70	80	85	28	25	M16 x P2	23	8	80	60
SAU-5	5T	205	105	75	100	105	30	30	M18 x P2	30	10	100	80
SAU-10	10T	205	110	85	100	105	40	30	M18 x P2	30	10	100	80
SAU-15	15T	230	150	90	120	140	44	45	M20 x P1.5	38	10	120	90
SAU-20	20T	320	200	115	150	200	48	50	M24 x P1.5	38	10	150	130

FEATURES:

- Coordinate with anchor, Easy to assemble
- When the ground is not flat, may remain fully engaged (four units assemble)
- Suitable for high precision machine

Type BU

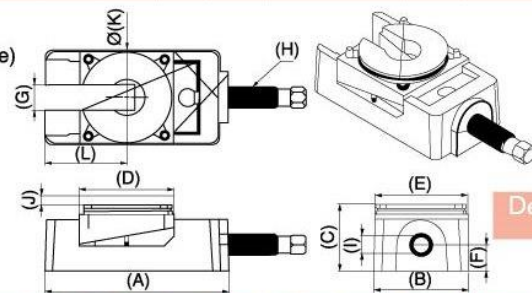



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	J	K	L
BU-3	3T	160	80	65	80	85	28	25	M20 x P2	19	6	80	60
BU-5	5T	205	105	70	100	105	30	30	M24 x P2	23	8	100	80
BU-10	10T	205	110	80	100	105	40	30	M24 x P2	23	8	100	80
BU-15	15T	230	150	90	140	140	44	45	M30 x P1.5	30	8	140	90
BU-20	20T	320	200	115	150	200	44	50	M30 x P1.5	30	8	150	130

Type SBU

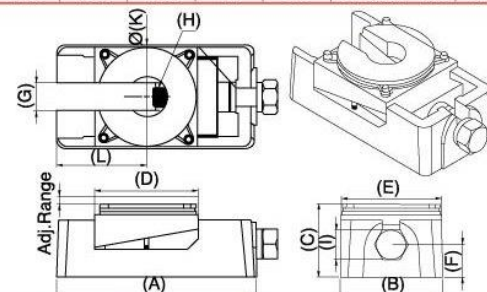



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj.Range	K	L
SBU-3	3T	160	80	70	80	85	28	25	M16 x P2	23	6	80	60
SBU-5	5T	205	105	75	100	105	30	30	M18 x P2	30	8	100	80
SBU-10	10T	205	110	85	100	105	40	30	M18 x P2	30	8	100	80
SBU-15	15T	230	150	90	120	140	44	45	M20 x P1.5	38	8	120	90
SBU-20	20T	320	200	115	150	200	48	50	M24 x P1.5	38	8	150	130

- Suitable for General Machine • Coordinate with anchor, Easy to assemble
- Screws can be vertically adjusted. Suitable for reinforcing large area table or else (three units assemble)

Type V-SA

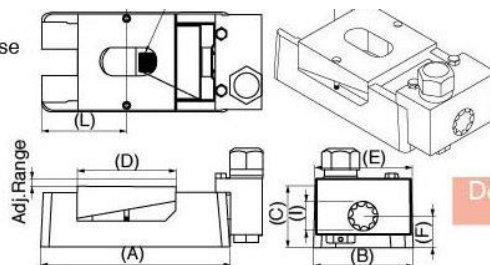



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj. Range	L
VSA-3	3T	160	80	60	80	85	28	25	M16 x P2	23	8	60
VSA-5	5T	205	105	65	100	105	30	30	M18 x P2	30	10	80
VSA-10	10T	205	110	75	100	105	40	30	M18 x P2	30	10	80
VSA-15	15T	230	150	80	120	140	44	45	M20 x P1.5	38	10	90
VSA-20	20T	320	200	105	150	200	48	50	M24 x P1.5	38	10	130

Type V-SB

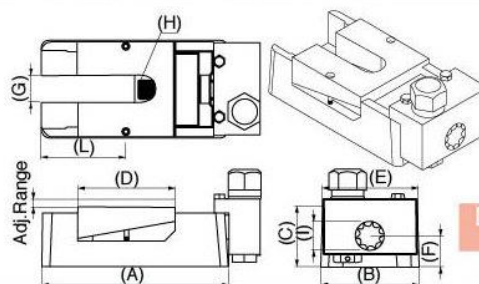

Development elevation



UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj. Range	L
VSB-3	3T	160	80	60	80	85	28	25	M16 x P2	23	6	60
VSB-5	5T	205	105	65	100	105	30	30	M18 x P2	30	8	80
VSB-10	10T	205	110	75	100	105	40	30	M18 x P2	30	8	80
VSB-15	15T	230	150	80	120	140	44	35	M20 x P1.5	38	8	90
VSB-20	20T	320	200	105	150	200	44	40	M24 x P1.5	38	8	130

FEATURES:

- Coordinate with anchor, Easy to assemble • When the ground is not flat, may remain fully engaged
- Suitable for high precision machine
- Screws can be vertically adjusted, Suitable for reinforcing large area table or else (four units assemble)

Type V-SAU

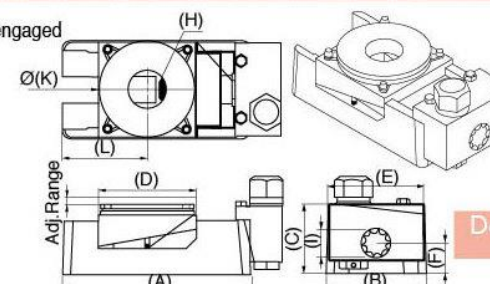



Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj. Range	K	L
VSAU-3	3T	160	80	70	80	85	28	25	M16 x P2	23	8	80	60
VSAU-5	5T	205	105	75	100	105	30	30	M18 x P2	30	10	100	80
VSAU-10	10T	205	110	85	100	105	40	30	M18 x P2	30	10	100	80
VSAU-15	15T	230	150	90	120	140	44	45	M20 x P1.5	38	10	120	90
VSAU-20	20T	320	200	115	150	200	48	50	M24 x P1.5	38	10	150	130

Type V-SBU

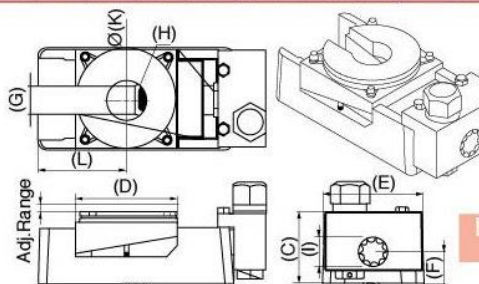

Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj. Range	K	L
VSB-3	3T	160	80	70	80	85	28	25	M16 x P2	23	6	80	60
VSB-5	5T	205	105	75	100	105	30	30	M18 x P2	30	8	100	80
VSB-10	10T	205	110	85	100	105	40	30	M18 x P2	30	8	100	80
VSB-15	15T	230	150	90	120	140	44	45	M20 x P1.5	38	8	120	90
VSB-20	20T	320	200	115	150	200	48	50	M24 x P1.5	38	8	150	130



FEATURES:

- When the ground is not flat, may remain fully engaged
- Suitable for high precision machine
- Can be used to adjust the horizontal and vertical directions

Type SAU-T



Installation drawing

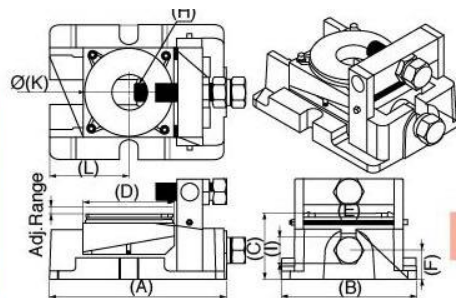

Development elevation

UNIT : mm

NO	LOAD	A	B	C	D	E	F	G	H	I	Adj.Range	K	L
SAU-T-3	3T	160	80	70	80	85	28	25	M16 x P2	23	8	80	60
SAU-T-5	5T	205	105	75	100	105	30	30	M18 x P2	30	10	100	80
SAU-T-10	10T	205	150	85	100	105	40	30	M18 x P2	30	10	100	80
SAU-T-15	15T	230	150	90	120	140	44	45	M20 x P1.5	38	10	120	90
SAU-T-20	20T	320	200	115	150	200	48	50	M24 x P1.5	38	10	150	130

VERTICAL LEVEL ADJUSTING BASE

TAIWAN



FEATURES:

- It is not expensive and stable
- Coordinate with anchor, Easy to assemble
- Universal joint, fully engaged on the ground
- Suitable for small and medium machine (four units assemble)

Type CA



Installation drawing

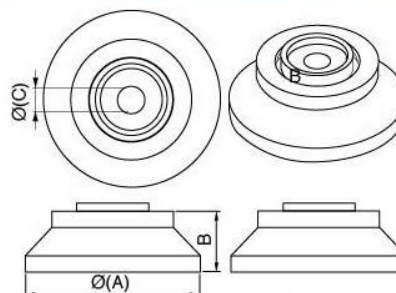

Development elevation



UNIT : mm

NO	A	B	C
CA-1	100	40	20
CA-2	130	45	20

Type CB



Installation drawing

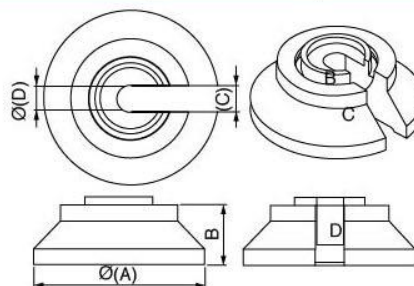

Development elevation

UNIT : mm


NO	A	B	C	D
CB-1	100	40	18	18
CB-2	130	45	22	22

ACCESSORIES

TAIWAN

Braided Anchor (European specifications)


Universal Washer

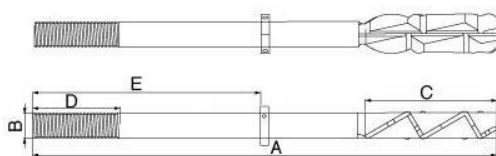

UNIT : mm

NO	A	B	C	D	E
AHx600xM16	600	M16	170	120	
AHx600xM20	600	M20	170	120	
AHx600xM24	600	M24	170	120	
AHx600xM30	600	M30	170	120	
AHx600xM36	600	M36	260	150	

Any size



UNIT : mm

NO	A	B	C	D	E
M24	54	48	17	28	26
M30	63	54	19	34	32
M36	78	68	21	40	38

Extension Rod

